




RS-485 Wireless Receiver


Quick Start Guide

Appearance

Indicator and Function Button

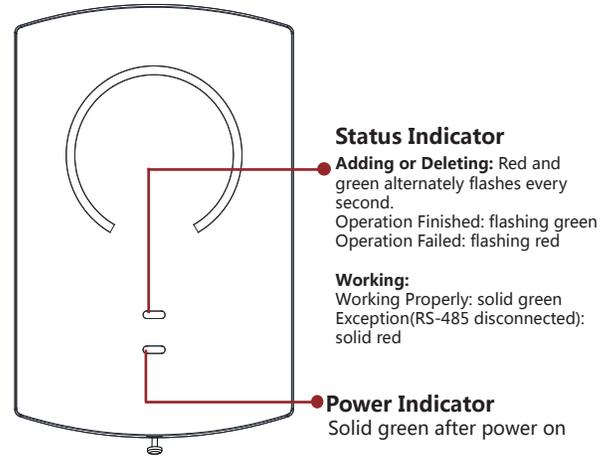

Loosen the screw on the bottom to disassemble the device.

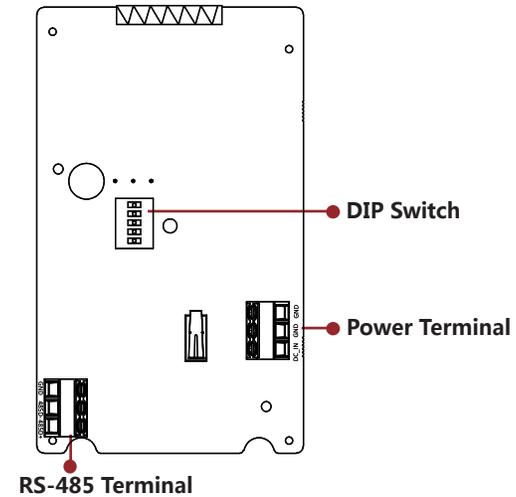

The power of wireless receiver is supplied by control panel on the model of DS-19A08-BN, DS-19A08-BNG, and DS-19A08-DNG. The power supply of the control panel is made by Channel Well Technology Co.,Ltd., and meets LPS.

1


2

DIP Address Settings

The DIP address and associated zone No. for different control panels are shown below :

Network Security Control Panel	Bus Security Control Panel
8-Zone Control Panel	Add.1->Zone 9-16
Add.1->Zone 9-16	Add.2->Zone 17-24
Add.2->Zone 17-24	Add.3->Zone 25-32
Add.3->Zone 25-32	Add.4->Zone 33-40
Add.4->Zone 33-40	Add.5->Zone 41-48
Add.5->Zone 41-48	⋮
16-Zone Control Panel	Add.29->Zone 233-240
Add.2->Zone 17-24	Add.30->Zone 241-248
Add.3->Zone 25-32	Add.31->Zone 249-256
Add.4->Zone 33-40	
Add.5->Zone 41-48	

When the switch is towards ON, the binary value is 1. If you set the DIP switch like the figure displayed below, its binary value is 00010, and its decimal value is 2.

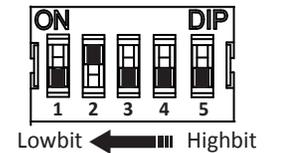


3

Quick Operation

1 Receiver Wiring

Wire the receiver according to the diagram.

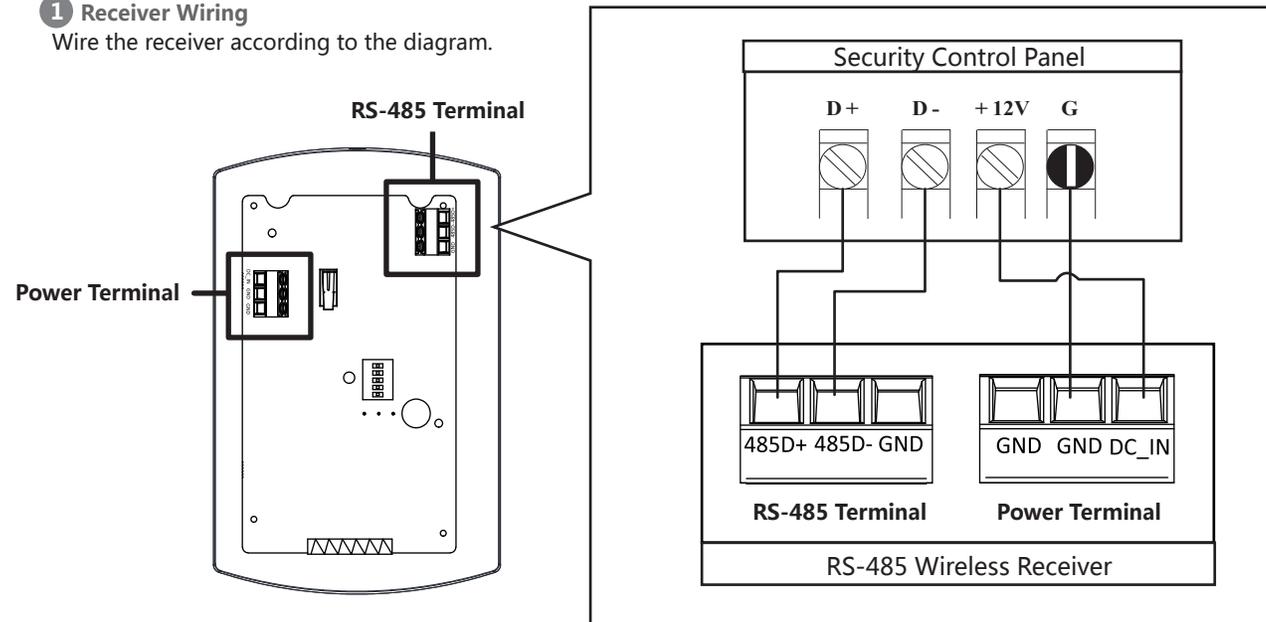

4

5

Specification

RS-485 Wireless Receiver	
RF Frequency	433MHz
RF Modulation	2GFSK
Transmission Speed	10.0kbps
RF Transmission Distance	400m
Power Supply	12 VDC
RS-485 Interface	1
DIP Switch	5 bits (address 0 to 31)
Tamper-proof	2(front/rear panel)
Indicator	2, power and status
Material	PC+ABS
Operation Environment	Indoor
Temperature	-10°C to +55°C
Humidity	10% to 90%
Dimension(L*W*H)	161mm*105mm*28mm
Installation	Wall Mounting

6



Quick Operation

2 Add/Delete Wireless Detector

Only the installer and administrator can add/delete the wireless detector.

Add Detector to the Control Panel

1. Enter the following command to make the control panel enter the adding mode. The zone No. should be 3digits, enter 0 on the high-order position for deficiency, e.g. ,enter 023 if the zone No. is 23.

[Password]+[*]+[95]+[Zone No.]+[#]

The password includes installer password and admin password(operator 1 password).

2. Trigger the detector to add the detector to the control panel.

3. Enter the following command to make the control panel exit the adding mode.

[*]+[#]

At most 8 wireless devices can be connected to a wireless receiver.

7

3 Install Receiver


1. Install the rear panel.

Secure the rear panel on the wall with 5 screws.
Loosen the screw on the bottom of the receiver to disassemble the device before installation and wiring.


2. Fix the PCB board on the rear panel.

3. Route the cables.

4. Fix the front panel on the rear panel by tightening the set screw.

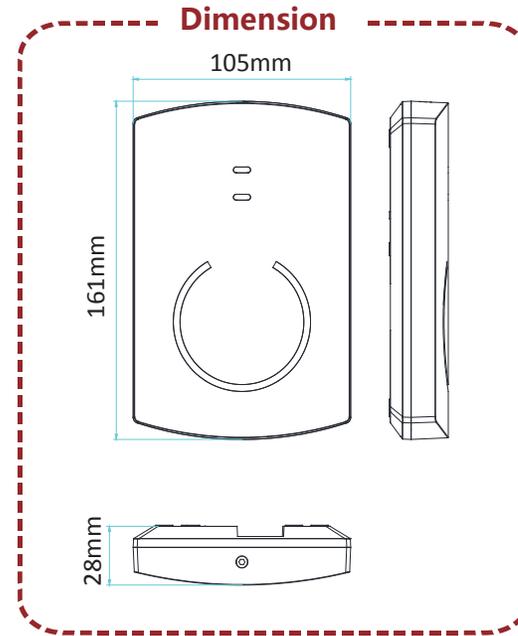

8

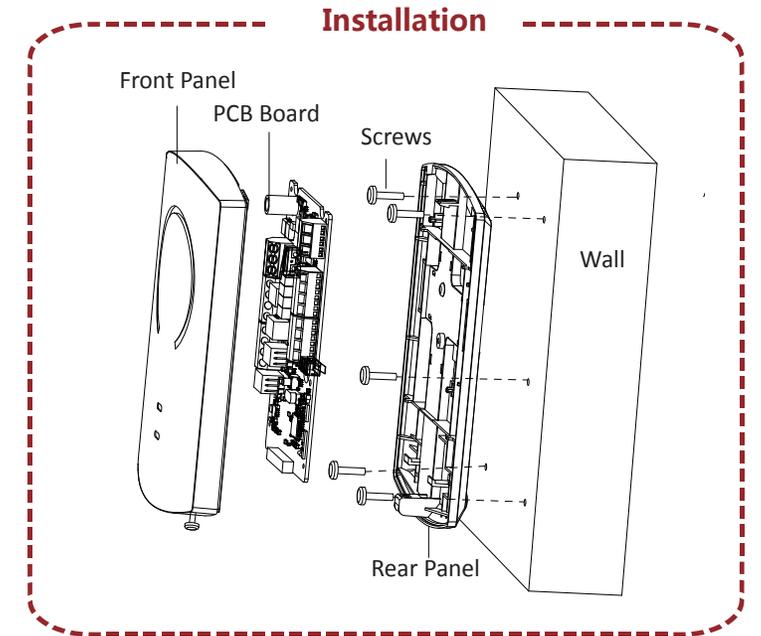

10

Quick Operation

Delete Detector to the Control Panel

1. Enter the following command to make the control panel enter the deleting mode.

[Password]+[*]+[96]+[#]

The password includes installer password and admin password(operator 1 password).

2. Trigger the detector to delete the detector to the control panel.

3. Enter the following command to make the control panel exit the deleting mode.

[*]+[#]

You can also add/delete the detector via client software. For details, refer to **Security Control Panel Programming Guide**.

You can add/delete keyfob via programming. For details, refer to **Security Control Panel Programming Guide**.

11

COPYRIGHT ©2018 Hangzhou Hikvision Digital Technology Co., Ltd.
ALL RIGHTS RESERVED.

Any and all information, including, among others, wordings, pictures, graphs are the properties of Hangzhou Hikvision Digital Technology Co., Ltd. or its subsidiaries (hereinafter referred to be "Hikvision"). This user manual (hereinafter referred to be "the Manual") cannot be reproduced, changed, translated, or distributed, partially or wholly, by any means, without the prior written permission of Hikvision. Unless otherwise stipulated, Hikvision does not make any warranties, guarantees or representations, express or implied, regarding to the Manual.

About this Manual

This Manual is applicable to Control Panel. The Manual includes instructions for using and managing the product. Pictures, charts, images and all other information hereinafter are for description and explanation only. The information contained in the Manual is subject to change, without notice, due to firmware updates or other reasons. Please find the latest version in the company website (<http://overseas.hikvision.com/en/>). Please use this user manual under the guidance of professionals.

12

HIKVISION Trademarks Acknowledgement and other Hikvision's trademarks and logos are the properties of Hikvision in various jurisdictions. Other trademarks and logos mentioned below are the properties of their respective owners.

Legal Disclaimer

TO THE MAXIMUM EXTENT PERMITTED BY APPLICABLE LAW, THE PRODUCT DESCRIBED, WITH ITS HARDWARE, SOFTWARE AND FIRMWARE, IS PROVIDED "AS IS", WITH ALL FAULTS AND ERRORS, AND HIKVISION MAKES NO WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION, MERCHANTABILITY, SATISFACTORY QUALITY, FITNESS FOR A PARTICULAR PURPOSE, AND NON-INFRINGEMENT OF THIRD PARTY. IN NO EVENT WILL HIKVISION, ITS DIRECTORS, OFFICERS, EMPLOYEES, OR AGENTS BE LIABLE TO YOU FOR ANY SPECIAL, CONSEQUENTIAL, INCIDENTAL, OR INDIRECT DAMAGES, INCLUDING, AMONG OTHERS, DAMAGES FOR LOSS OF BUSINESS PROFITS, BUSINESS INTERRUPTION, OR LOSS OF DATA OR DOCUMENTATION, IN CONNECTION WITH THE USE OF THIS PRODUCT, EVEN IF HIKVISION HAS BEEN ADVISED OF THE POSSIBILITY OF SUCH DAMAGES.

13

REGARDING TO THE PRODUCT WITH INTERNET ACCESS, THE USE OF PRODUCT SHALL BE WHOLLY AT YOUR OWN RISKS. HIKVISION SHALL NOT TAKE ANY RESPONSIBILITIES FOR ABNORMAL OPERATION, PRIVACY LEAKAGE OR OTHER DAMAGES RESULTING FROM CYBER ATTACK, HACKER ATTACK, VIRUS INSPECTION, OR OTHER INTERNET SECURITY RISKS; HOWEVER, HIKVISION WILL PROVIDE TIMELY TECHNICAL SUPPORT IF REQUIRED.

SURVEILLANCE LAWS VARY BY JURISDICTION. PLEASE CHECK ALL RELEVANT LAWS IN YOUR JURISDICTION BEFORE USING THIS PRODUCT IN ORDER TO ENSURE THAT YOUR USE CONFORMS THE APPLICABLE LAW. HIKVISION SHALL NOT BE LIABLE IN THE EVENT THAT THIS PRODUCT IS USED WITH ILLEGITIMATE PURPOSES. IN THE EVENT OF ANY CONFLICTS BETWEEN THIS MANUAL AND THE APPLICABLE LAW, THE LATER PREVAILS.



This product and - if applicable - the supplied accessories too are marked with "CE" and comply therefore with the applicable harmonized European standards listed under the RE Directive 2014/53/EU, the EMC Directive 2014/30/EU, the LVD Directive 2014/35/EU, the RoHS Directive 2011/65/EU.